



REV.	DESCRIPTION	DRW.	CHK.	APP.	DATE
A	RELEASE	張琇容	王盛富	郭豐榮	108.03.13

SPECIFICATIONS
 Current Rating:
 3 Amp
 Voltage Rating:
 230V
 Insulator resistance:
 5000 Megohms Min.
 Contact resistance:
 20 m ohms Max.
 Dielectric withstanding:
 AC 500V/minute
 Operating Temperature:
 -25°~+85°C
 Contact Material:
 Brass
 Insulator Material:
 PBT
 +Glass Fiber
 UL94V-0
 Color:
 Black
 Contact Plated:
 Gold Flash

Note:
 Appearance are completely
 match the rule of the
 products inspection procedure

RoHS Compliant

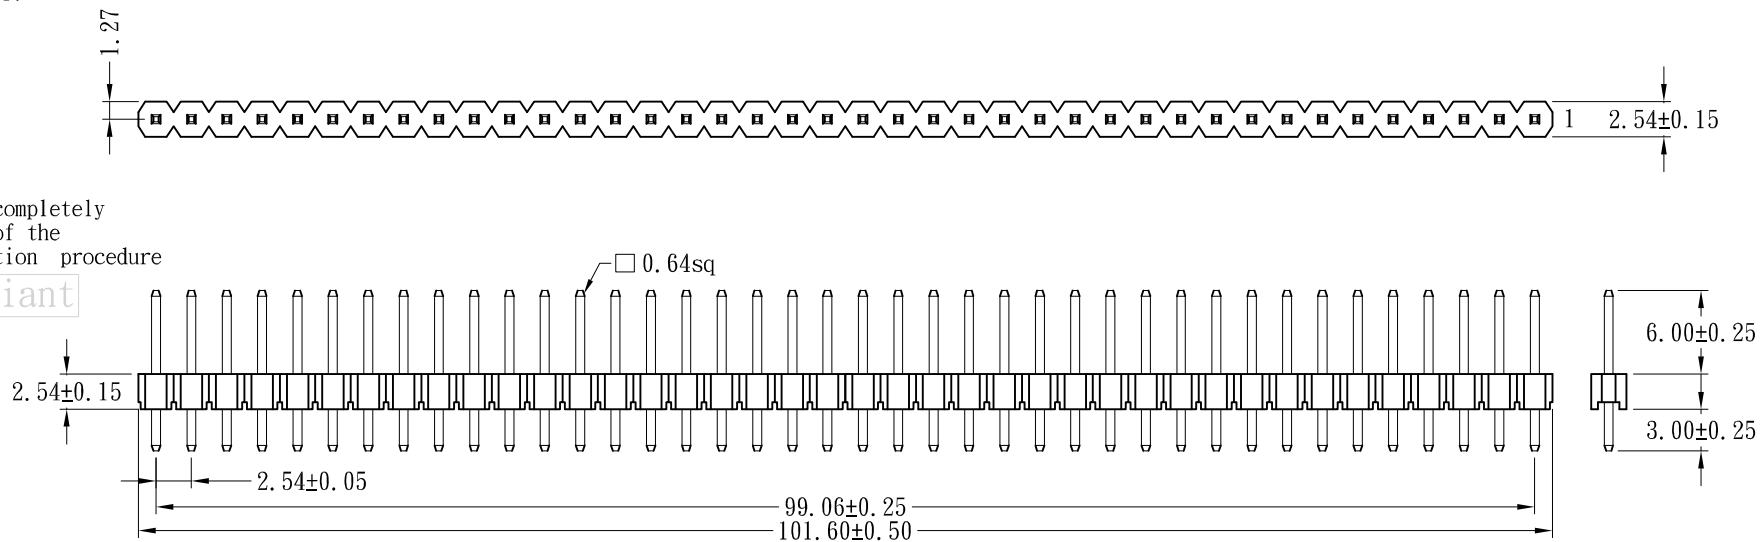

Ordering infomation:
 21X12564-XXS10X-XXX-A/B*X
 B PBT
 N Nylon-6T
 L LCP
 Number of Contact
 02-40
 Color
 B Black
 *A BOX
 *B TUBE
 *P BAG
 *R REEL
 *T TRAY
 Dimension
 G Gold Plated
 T Tin Plated
 H Duplex Plated
 Contact Plating
 01 Normal
 11 Normal matte tin
 10 10μ"
 :
 :

10S-40S10B-01G

成品規格圖				APP.	ANGLES	±3°	SIZE	A4		
TITLE	2.54mm Pin Header Straight Type			DR.	張琇容	108.03.13	DIMS	0.0 ±0.38	SCALE	2:1
PART NO	21B12564-40S10B-01G-6/3*P						TOLERANCE	0.00±0.25	SHEET	1/1
DRW NO	21-20190313-020									
UNIT	mm(INCH)	PROJECT	◎ ◻							