


(1,27mm) .050"

SEAF SERIES

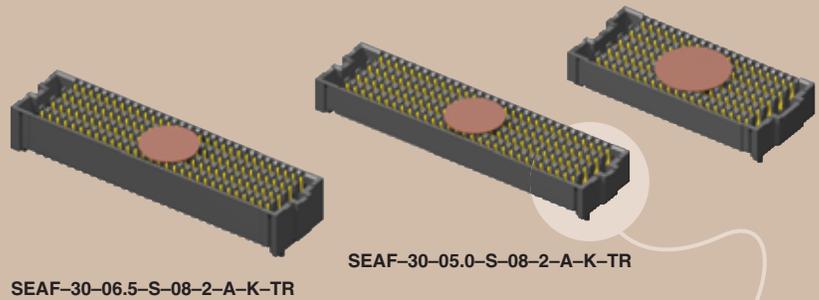

HIGH SPEED/HIGH DENSITY OPEN PIN FIELD



SPECIFICATIONS

For complete specifications and recommended PCB layouts see www.samtec.com?SEAF

- Insulator Material:** Black LCP
- Contact Material:** Copper Alloy
- Solder Charge:** 95.5% Sn, 3.8% Ag, 0.7% Cu (Tin/Lead also available. Call Samtec.)
- Operating Temp Range:** -55°C to +125°C
- Plating:** Au or Sn over 50µ" (1,27µm) Ni
- Contact Resistance:** 5.5 mΩ
- Working Voltage:** 240 VAC
- RoHS Compliant:** Yes
- Lead-Free Solderable:** Yes




Mates with:
SEAM, SADL,
SEAMP,
SEAC
(Requires -LP)

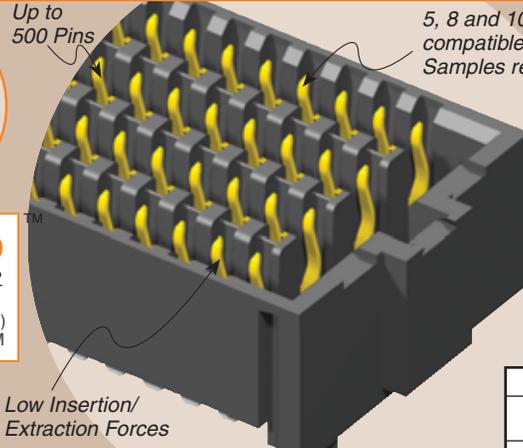

5, 8 and 10 row footprint compatible with SamArray®. Samples recommended.

Solder charges



Low Insertion/Extraction Forces

7mm Stack Height	Rated @ 3dB Insertion Loss
Single-Ended Signaling	9.5 GHz / 19 Gbps
Differential Pair Signaling	10.5 GHz / 21 Gbps

Performance data for other stack heights and complete test data available at www.samtec.com?SEAF or contact sig@samtec.com

CURRENT RATING	
AMBIENT TEMP	SEAM/SEAF
20°C	2.3A
40°C	2A
60°C	1.75A
95°C	1.14A

30 ADJACENT POSITIONS POWERED

Industry Standards

PISMO 2
VITA 47
VITA 57

Protocols Supported

Fibre Channel
Rapid I/O
PCI Express®
SATA
Infiniband

Download app notes at www.samtec.com/appnote
Contact SIG @ samtec.com for questions on protocols

SEAF - NO. PINS PER ROW - LEAD STYLE - PLATING OPTION - NO. OF ROWS - 2 - A - OPTION - K - TR

-10, -15, -20, -30, -40, -50
(-10 only available in 04 row)
(-15 only available in 10 row)

Specify LEAD STYLE from chart

LEAD STYLE	A	NO. OF ROWS	B
-05.0	(5,05) .199	-04.0	(5,61) .221
-06.0	(6,05) .238	-05, -06	(8,20) .323
-06.5	(6,55) .258	-08	(10,69) .421
-08.0	(8,05) .317	-10	(13,23) .521

-L = 10µ" (0,25µm)
Gold on contact area, Matte Tin on solder tail

-S = 30µ" (0,76µm)
Gold on contact area, Matte Tin on solder tail

-04 = Four Rows
-05 = Five Rows

-06 = Six Rows
-08 = Eight Rows

-10 = Ten Rows

-2 = Lead-Free Solder Charge

-LP = Latch Post (-LP required for SEAC mate only)


APPLICATION SPECIFIC
-07.5 lead style for 30x4 available. Call Samtec.

ALSO AVAILABLE
Rugged solder crimp option. Call Samtec.

DIFFERENTIAL

ARRAY	PAIR COUNT
40x8	80
40x6	60
30x10	75
30x8	60
30x6	45
20x10	50
20x8	40
20x5	25

ARRAY	PAIR COUNT
50x10	125
50x8	100
40x10	100

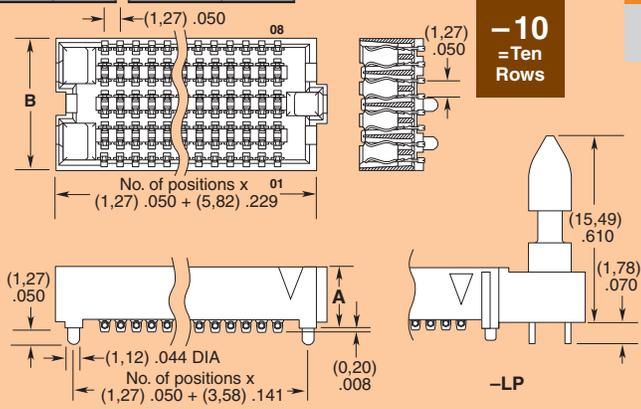

MATED HEIGHTS*

SEAM LEAD STYLE	SEAF LEAD STYLE			
	-05.0	-06.0	-06.5	-08.0
-02.0	7mm	8mm	8.5mm	10mm
-03.0	8mm	9mm	9.5mm	11mm
-03.5	8.5mm	9.5mm	10mm	11.5mm
-06.5	11.5mm	12.5mm	13mm	14.5mm
-07.0	12mm	13mm	13.5mm	15mm
-09.0	14mm	15mm	15.5mm	17mm
-11.0	16mm	17mm	17.5mm	19mm

*Processing conditions will affect mated height.

Note: Some sizes, styles and options are non-standard, non-returnable.

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM