


**USB 2.0 Isolator Industrial-Grade**



**USB-029H2**

**User's Manual**

**Ver. 1.0**

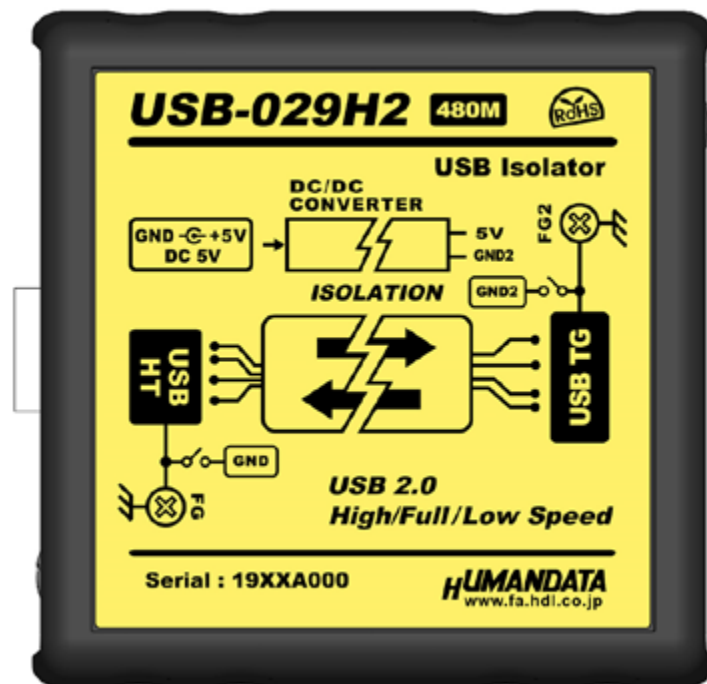

**HUMANDATA LTD.**





# Table of Contents

● Precautions .....	1
● Revision History .....	2
● Introduction .....	2
1. Overview .....	3
2. Feature .....	4
3. Connection .....	5
4. Power Supply .....	5
5. SG/FG Separation switch .....	5
6. FG Terminal .....	5
7. Specifications .....	6
7.1. Product Specification .....	6
7.2. AC adapter(Japan's specifications) .....	7
7.3. Optional Accessories .....	8
8. Additional Documentation and User Support .....	9
9. Attachment Documentations .....	9
10. Warranty and Compensation .....	9



## ● Precautions

 <p><b>Do Not</b></p>	1	This product uses ordinary off-the-shelf electronic components, and is therefore inappropriate for use in applications that require special quality or reliability and are expected to protect human lives or prevent accidents, such as safety mechanisms in fields including space, aeronautics, medicine, and nuclear power.
	2	Do not be used underwater or in high-humidity environments.
	3	Do not be used in the presence of corrosive gases, combustible gases, or other flammable gases.
	4	Do not turn on power when circuit board surface is in contact with other metal.
	5	Do not apply voltage higher than rated voltage.
 <p><b>Attention</b></p>	6	This manual may be revised in the future without notice owing to improvements.
	7	All efforts have been made to produce the best manual possible, but if users notice an error or other problem, we ask that they notify us.
	8	Item 7 notwithstanding, HuMANDATA cannot be held liable for the consequences arising from use of this product.
	9	HuMANDATA cannot be held liable for consequences arising from using this product in a way different from the uses described herein, or from uses not shown herein.
	10	This manual, circuit diagrams, sample circuits, and other content may not be copied, reproduced, or distributed without permission.
	11	If the product emits smoke, catches fire, or becomes unusually hot, cut the power immediately.
	12	Do not install the control cables or communication cables together with the main circuit lines or power cables. In such an environment, it may result in malfunction due to noise.
	13	Be careful of static electricity.

## ● Revision History

Date	Revision	Description
May 31, 2016	v1.0	Initial release


## ● Introduction

Thank you very much for purchasing our product.


USB-029H2 is a USB 2.0 High Speed(480Mbps), Full Speed(12Mbps) and Low Speed(1.5Mbps) compliant isolator that isolates between a USB host and a USB peripheral device.

## 1. Overview


### USB Host side

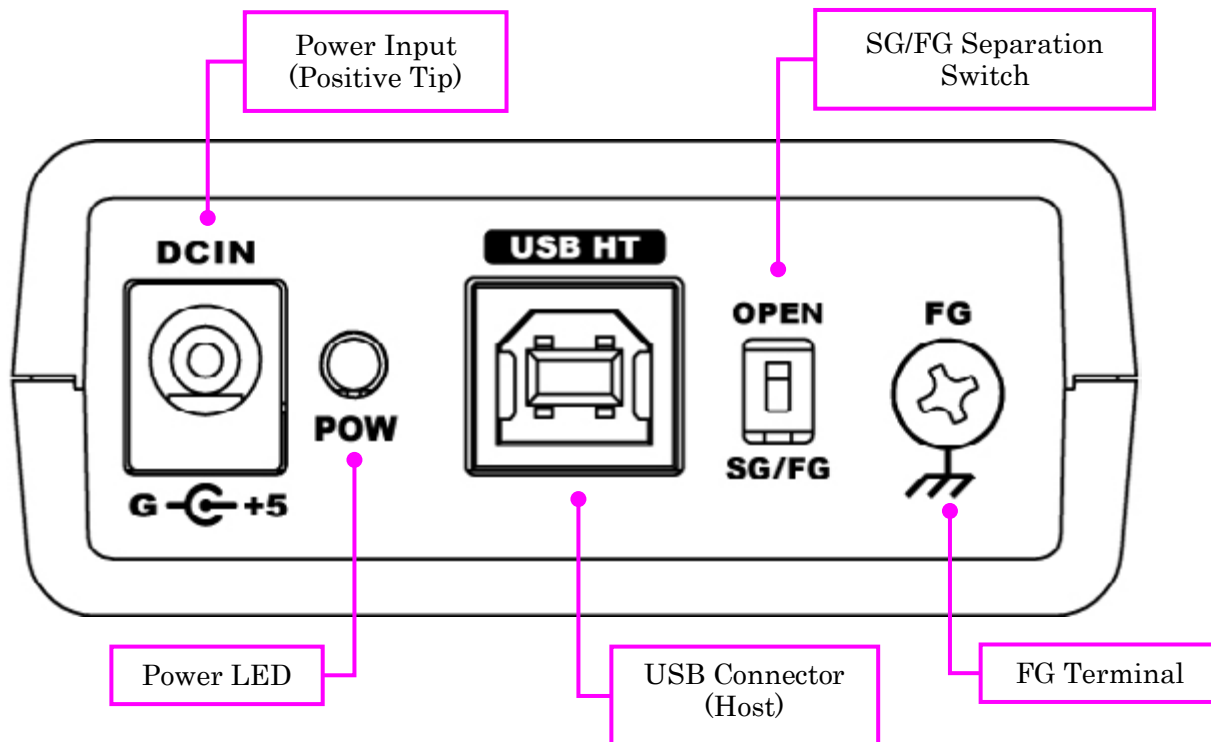

### USB Target side

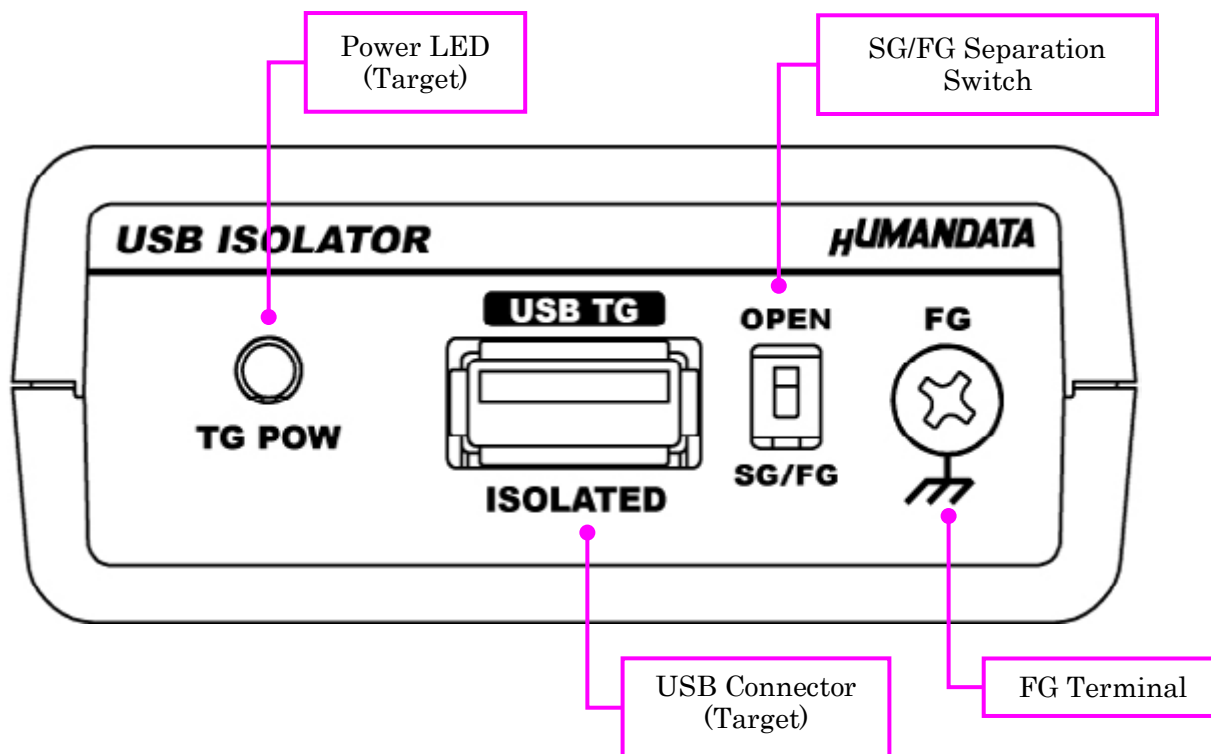

TOP side (Block diagram)

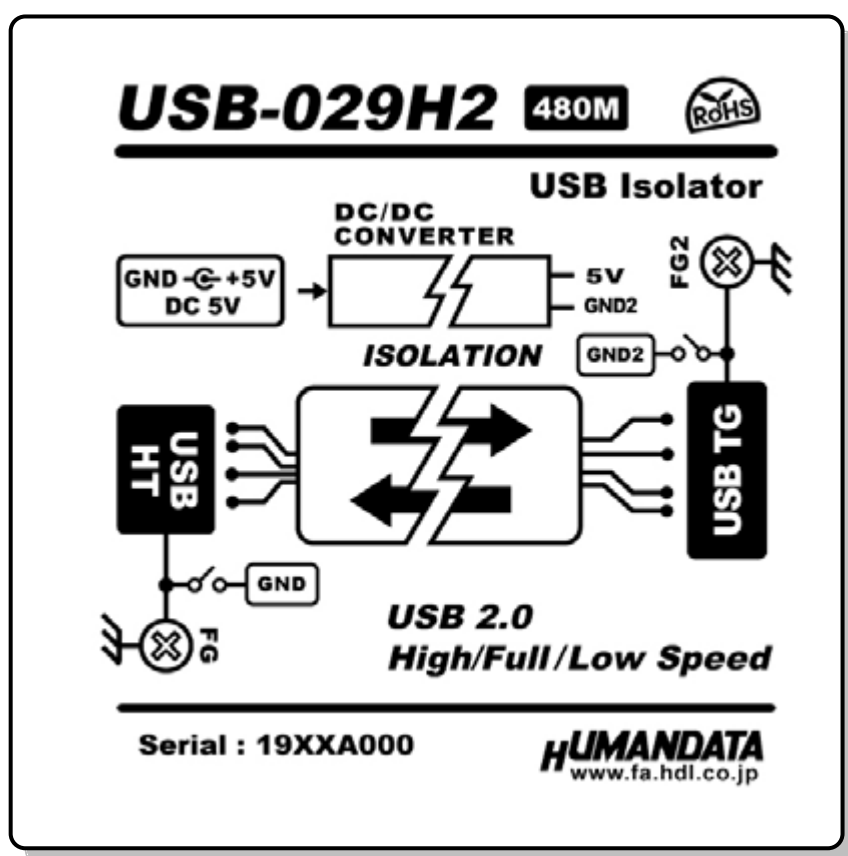

## 2. Feature

USB-029H2 is a USB 2.0 High Speed(480Mbps), Full Speed(12Mbps) and Low Speed(1.5Mbps) compliant isolator that between a USB host and a USB peripheral device are isolated.

With USB-029H2, it can be expected to eliminate ground loops that can cause measurement errors and equipment from surges, common-mode voltage, static discharge, magnetic fields, and radio frequency interference.

There is no need to install any drivers. It works with every operating system of Windows, Linux, Mac OS X, and others.



### 3. Connection

You can use an included USB cable to the host side connector to the host (such as a personal computer), and connect a USB peripheral device to the target side connector.

### 4. Power Supply

USB-029H2 is powered through a USB port(Bus-powered) or an AC adapter (Self-powered). An AC adapter has priority when both supplies are applied.

### 5. SG/FG Separation switch

You can separate between SG(signal ground) and FG(frame ground) by the dip-switch each USB host and USB target.

Position	SG - FG
OPEN	Open
SG/FG	Connection



\* Host and target is same function.

### 6. FG Terminal

It is possible to connect a ground wire to this terminal when needed.



## 7. Specifications

### 7.1. Product Specification




Item	Description	Remarks
Model	USB-029H2	
Input Power	5VDC Supplied through a USB port(Bus-powered) or AC adapter(Self-powered)	Recommend the use of an AC adapter for stably supply An AC adapter supply to the host side.
Current Consumption	Less than 100mA + current of the target device	500mA max.
HOST interface	USB 2.0 Compliant Supports High, Full and Low Speed	USB 1.1 compatible ESD protection
Isolation Method	Bus isolation	
Isolation Protection	3000VDC	Designed value
Support OS	OS-Independent (No drivers required)	
LED	POW: Power LED TG POW: Target Power LED	
Operating Ambient Temperature	-10 to 60 °C	No condensation permitted
Operating Ambient Humidity	30 to 85%RH	
Storage Ambient Temperature	-20 to 60 °C	
Storage Ambient Humidity	30 to 85%RH	
Weight	Approx. 90 [g]	Only main body
Dimensions	67 x 67 x 28 [mm] (2.638" x 2.638" x 1.102")	Without projections

## 7.2. AC adapter(Japan's specifications)

Item	Description	Remarks
Output	5VDC 2.0A	
Plug	2.1mm inner diameter	Positive Tip
Compatible DC Jack	2.1mm inner diameter	
Operating Ambient Temperature	0 to 40 °C	No condensation permitted
Operating Ambient Humidity	30 to 85 % RH	
Storage Ambient Temperature	-20 to 80 °C	
Storage Ambient Humidity	10 to 95 % RH	
Wire Length	1.6m	
Weight	approx. 70 [g]	
Dimensions	46 x 34 x 25 [mm] 1.811" x 1.339" x 0.984"	Without projections

\* There may be cases that this part and specifications are changed.

### 7.3. Optional Accessories

Model	Image	Description
PEN-003		USB series Attachment with clamping screw JAN : 4937920800709
PEN-003-DIN		USB series Attachment for 35mm DIN rail JAN : 4937920800716
PEN-003-MG		USB series Attachment with neodymium magnet JAN : 4937920801201

## 8. Additional Documentation and User Support

The following documents and other supports are available at

<http://www.hdl.co.jp/en/faspc/USB/usb-029h2>

- User's Manual
- ... and more.

## 9. Attachment Documentations

- Outline drawing of the USB-029H2
- Outline drawing of the AC Adapter

## 10. Warranty and Compensation

Please refer to the following URL for the warranty.

<http://www.fa.hdl.co.jp/en/fa-warranty.html>

---

# USB 2.0 Isolator Industrial-Grade

## USB-029H2

### User's Manual

Ver. 1.0 ..... May. 31, 2016

---

**HuMANDATA LTD.**

Address: 1-2-10-2F, Nakahozumi, Ibaraki  
Osaka, Japan  
ZIP 567-0034  
Tel: 81-72-620-2002 (Japanese)  
Fax: 81-72-620-2003 (Japanese/English)  
URL: <http://www.fa.hdl.co.jp> (Japan)  
[http://www.fa.hdl.co.jp/en\(Global\)](http://www.fa.hdl.co.jp/en(Global))

---

---